

# 3300 XL 8mm Proximity Transducer System

Bently Nevada™ Asset Condition Monitoring

---

## Description

The 3300 XL 8 mm Proximity Transducer System consists of:

- a 3300 XL 8 mm probe
- a 3300 XL extension cable
- a 3300 XL Proximito<sup>®</sup> Sensor<sup>1</sup>

The system provides an output voltage directly proportional to the distance between the probe tip and the observed conductive surface. It is capable of both static (position) and dynamic (vibration) measurements, and is primarily used for vibration and position measurement applications on fluid-film bearing machines, as well as Keyphasor<sup>®</sup> and speed measurement applications<sup>2</sup>.

The 3300 XL 8 mm system represents our most advanced performance in an eddy current proximity transducer system. The standard 3300 XL 8 mm 5 metre system is also 100% compliant with the American Petroleum Institute's (API) 670 Standard (4<sup>th</sup> Edition) for mechanical configuration, linear range, accuracy, and temperature stability. All 3300 XL 8 mm Proximity Transducer Systems achieve this level of performance while allowing complete interchangeability of probe, extension cable, and Proximito<sup>®</sup> Sensor without the need for individual component matching or bench calibration.

Each component of the 3300 XL 8 mm Transducer System is backward compatible and interchangeable<sup>3</sup> with other non-XL 3300 series 5 and 8 mm transducer system components<sup>4</sup>. This includes the 3300 5 mm probe, which is used when an 8 mm probe is too large for the available mounting space<sup>5,6</sup>.

### Proximito<sup>®</sup> Sensor

The 3300 XL Proximito<sup>®</sup> Sensor incorporates numerous improvements over previous designs. Its physical packaging permits high-density DIN-rail installation. It can also be mounted in a traditional panel mount configuration, where it shares an identical "footprint" to older 4-hole mounted Proximito<sup>®</sup> Sensor designs. The mounting base for either option provides electrical isolation, eliminating the need for separate isolator plates. The 3300 XL Proximito<sup>®</sup> Sensor is highly immune to radio frequency interference, allowing installation in fiberglass housings without adverse effects from nearby radio frequency signals. Improved RFI/EMI immunity allows the 3300 XL Proximito<sup>®</sup> Sensor to achieve European CE mark approvals without requiring special shielded conduit or metallic housings, resulting in lower installation costs and complexity.

The 3300 XL's SpringLoc terminal strips require no special installation tools and facilitate faster, more robust field wiring connections by eliminating screw-type clamping mechanisms that can loosen.



imagination at work

---

Specifications and Ordering Information  
Part Number 141194-01  
Rev. H (08/07)

Page 1 of 30

## Proximity Probe and Extension Cable

The 3300 XL probe and extension cable also reflect improvements over previous designs. A patented TipLoc™ molding method provides a more robust bond between the probe tip and the probe body. The probe's cable is more securely attached as well, incorporating a patented CableLoc™ design that provides 330 N (75 lbf) pull strength where the probe cable attaches to the probe tip.

3300 XL 8 mm Probes and Extension Cables can also be ordered with an optional FluidLoc® cable option. This option prevents oil and other liquids from leaking out of the machine through the cable's interior.

## Connectors

The 3300 XL probe, extension cable, and Proximitor Sensor have corrosion-resistant, gold-plated ClickLoc™ connectors. These connectors require only finger-tight torque (connectors will "click"), and the specially engineered locking mechanism prevents the connectors from loosening. They do not require any special tools for installation or removal.

3300 XL 8 mm Probes and Extension Cables can also be ordered with connector protectors already installed. Connector protectors can also be supplied separately for installation in the field (such as when the cable must be run through restrictive conduit). Connector protectors are recommended for all installations and provide increased environmental protection<sup>7</sup>.

## Extended Temperature Range Applications

An Extended Temperature Range (ETR) Probe and Extension Cable are available for applications where either the probe lead or extension cable may exceed the 177 °C (350 °F) temperature specification. The Extended Temperature Range Probe has an extended temperature rating for up to 260 °C (500 °F) for the probe lead and connector. The probe tip must remain below 177 °C (350 °F). The Extended Temperature Range Extension Cable is also rated for up to 260 °C (500 °F). Both the ETR probe and cable are compatible with standard temperature probes and cables. For example, you can utilize an ETR probe with the 330130 extension cable. The ETR system uses the standard 3300 XL Proximitor Sensor. When using any ETR component as part of your system, the accuracy is limited to the accuracy of the ETR system.

## Notes:

1. Proximitor Sensors are supplied by default from the factory calibrated to AISI 4140 steel. Calibration to other target materials is available upon request.
2. Consult Bently Nevada Applications Note, Considerations when using Eddy Current Proximity Probes for Overspeed Protection Applications, when considering this transducer system for tachometer or overspeed measurements.
3. 3300 XL 8 mm components are both electrically and physically interchangeable with non-XL 3300 5 and 8 mm components. Although the packaging of the 3300 XL Proximitor Sensor differs from its predecessor, it is designed to fit in the same 4-hole mounting pattern when used with the 4-hole mounting base, and will fit within the same mounting space specifications (when minimum permissible cable bend radius is observed).
4. When XL and non-XL 3300-series 5 and 8 mm system components are mixed, system performance is limited to the specifications for the non-XL 3300 5 and 8 mm Transducer System.
5. The 3300-series 5 mm probe (refer to Specifications and Ordering Information p/n 141605-01) uses smaller physical packaging, but does not permit reduced side view clearances or tip-to-tip spacing requirements compared to an 8 mm probe. It is used when physical (not electrical) constraints preclude the use of an 8 mm probe. When narrow side view probes are required, use the 3300 NSv™ Proximity Transducer System (refer to Specifications and Ordering Information p/n 147385-01).
6. 8 mm probes provide a thicker encapsulation of the probe coil in the molded PPS plastic probe tip. This results in a more rugged probe. The larger diameter of the probe body also provides a stronger, more robust case. We recommend the use of 8 mm probes when possible to provide optimal robustness against physical abuse.
7. Silicone tape is also provided with each 3300 XL extension cable and can be used instead of connector protectors. Silicone tape is not recommended in applications where the probe-to-extension cable connection will be exposed to turbine oil.

## Specifications

Unless otherwise noted, the following specifications are for a 3300 XL 8 mm Proximitor Sensor, extension cable and 8 mm probe between +18 °C and +27 °C (+64 °F to +80 °F), with a -24 Vdc power supply, a 10 kilo  $\Omega$  load, an AISI 4140 steel target, and a probe gapped at 1.27 mm (50 mils). Performance characteristics are applicable for systems that consist solely of 3300 XL 8 mm components. The system accuracy and interchangeability specifications do not apply when using a transducer system calibrated to any target other than our AISI 4140 steel target.

### Electrical

#### Proximitor Sensor Input:

Accepts one noncontacting 3300-series 5 mm, 3300 8 mm **or** 3300 XL 8 mm Proximity Probe and Extension Cable.

#### Power:

Requires -17.5 Vdc to -26 Vdc without barriers at 12 mA maximum consumption, -23 Vdc to -26 Vdc with barriers. Operation at a more positive voltage than -23.5 Vdc can result in reduced linear range.

#### Supply Sensitivity:

Less than 2 mV change in output voltage per volt change in input voltage.

#### Output resistance:

50  $\Omega$

#### Probe dc resistance (nominal) ( $R_{PROBE}$ ) table:

Probe Length	Resistance from the Center Conductor to the Outer Conductor ( $R_{PROBE}$ ) (ohms)
0.5	7.45 $\pm$ 0.50
1.0	7.59 $\pm$ 0.50
1.5	7.73 $\pm$ 0.50
2.0	7.88 $\pm$ 0.50
5.0	8.73 $\pm$ 0.70

9.0	9.87 $\pm$ 0.90
-----	-----------------

#### Extension cable dc resistance (nominal):

Length of Extension Cable	Resistance from Center Conductor to Center Conductor ( $R_{CORE}$ ) (ohms)	Resistance from Outer Conductor to Outer Conductor ( $R_{JACKET}$ ) (ohms)
3.0	0.66 $\pm$ 0.10	0.20 $\pm$ 0.04
3.5	0.77 $\pm$ 0.12	0.23 $\pm$ 0.05
4.0	0.88 $\pm$ 0.13	0.26 $\pm$ 0.05
4.5	0.99 $\pm$ 0.15	0.30 $\pm$ 0.06
7.0	1.54 $\pm$ 0.23	0.46 $\pm$ 0.09
7.5	1.65 $\pm$ 0.25	0.49 $\pm$ 0.10
8.0	1.76 $\pm$ 0.26	0.53 $\pm$ 0.11
8.5	1.87 $\pm$ 0.28	0.56 $\pm$ 0.11

#### Extension cable capacitance:

69.9 pF/m (21.3 pF/ft) typical

#### Field wiring:

0.2 to 1.5 mm<sup>2</sup> (16 to 24 AWG) . Recommend using three-conductor shielded triax cable and tinned field wiring. Maximum length of 305 metres (1,000 feet) between the 3300 XL Proximitor Sensor and the monitor. See the frequency response graphs, figures 10 through 13 (pages 22 and 23) for signal rolloff at high frequencies when using longer field wiring lengths.

#### Linear Range:

2 mm (80 mils). Linear range begins at approximately 0.25 mm (10 mils) from target and is from 0.25 to 2.3 mm (10 to 90 mils) (approximately -1 to -17 Vdc).

#### Recommended Gap Setting:

1.27 mm (50 mils)

**Incremental Scale Factor (ISF)**

Less than  $\pm 0.038\text{mm}$  ( $\pm 1.5$  mil) with components at  $0\text{ }^{\circ}\text{C}$  to  $+45\text{ }^{\circ}\text{C}$  ( $+32\text{ }^{\circ}\text{F}$  to  $+113\text{ }^{\circ}\text{F}$ ).

**Standard 5 metre system:**

7.87 V/mm (200 mV/mil)  $\pm 5\%$  including interchangeability error when measured in increments of 0.25 mm (10 mils) over the 80 mil linear range from  $0$  to  $+45\text{ }^{\circ}\text{C}$  ( $+32\text{ }^{\circ}\text{F}$  to  $+113\text{ }^{\circ}\text{F}$ ).

**Standard 5 metre system performance over extended temperatures:**

Over a probe temperature range of  $-35\text{ }^{\circ}\text{C}$  to  $+120\text{ }^{\circ}\text{C}$  ( $-31\text{ }^{\circ}\text{F}$  to  $+248\text{ }^{\circ}\text{F}$ ) with the Proximitor Sensor and extension cable between  $0\text{ }^{\circ}\text{C}$  to  $+45\text{ }^{\circ}\text{C}$  ( $+32\text{ }^{\circ}\text{F}$  to  $+113\text{ }^{\circ}\text{F}$ ), the ISF remains within  $\pm 10\%$  of 7.87 V/mm (200 mV/mil) and the DSL remains within  $\pm 0.076\text{ mm}$  ( $\pm 3$  mils).

**Standard 9 metre system:**

7.87 V/mm (200 mV/mil)  $\pm 6.5\%$  including interchangeability error when measured in increments of 0.25 mm (10 mils) over the 80 mil linear range from  $0$  to  $+45\text{ }^{\circ}\text{C}$  ( $+32\text{ }^{\circ}\text{F}$  to  $+113\text{ }^{\circ}\text{F}$ ).

Over a Proximitor Sensor and extension cable temperature range of  $-35\text{ }^{\circ}\text{C}$  to  $+65\text{ }^{\circ}\text{C}$  ( $-31\text{ }^{\circ}\text{F}$  to  $+149\text{ }^{\circ}\text{F}$ ) with the probe between  $0\text{ }^{\circ}\text{C}$  to  $+45\text{ }^{\circ}\text{C}$  ( $+32\text{ }^{\circ}\text{F}$  to  $+113\text{ }^{\circ}\text{F}$ ), the ISF remains within  $\pm 10\%$  of 7.87 V/mm (200 mV/mil) and the DSL remains within  $\pm 0.076\text{ mm}$  ( $\pm 3$  mils).

**Extended Temperature Range (ETR) 5 and 9 metre systems:**

7.87 V/mm (200 mV/mil)  $\pm 6.5\%$  including interchangeability error when measured in increments of 0.25 mm (10 mils) over the 80 mil linear range from  $0$  to  $+45\text{ }^{\circ}\text{C}$  ( $+32\text{ }^{\circ}\text{F}$  to  $+113\text{ }^{\circ}\text{F}$ ).

**Standard 9 metre system performance over extended temperatures:**

Over a probe temperature range of  $-35\text{ }^{\circ}\text{C}$  to  $+120\text{ }^{\circ}\text{C}$  ( $-31\text{ }^{\circ}\text{F}$  to  $+248\text{ }^{\circ}\text{F}$ ) with the Proximitor Sensor and extension cable between  $0\text{ }^{\circ}\text{C}$  to  $+45\text{ }^{\circ}\text{C}$  ( $+32\text{ }^{\circ}\text{F}$  to  $+113\text{ }^{\circ}\text{F}$ ), the ISF remains within  $\pm 18\%$  of 7.87 V/mm (200 mV/mil) and the DSL remains within  $\pm 0.152\text{ mm}$  ( $\pm 6$  mils).

**Deviation from best fit straight line (DSL)**

**Standard 5 metre system:**

Less than  $\pm 0.025\text{mm}$  ( $\pm 1$  mil) with components at  $0\text{ }^{\circ}\text{C}$  to  $+45\text{ }^{\circ}\text{C}$  ( $+32\text{ }^{\circ}\text{F}$  to  $+113\text{ }^{\circ}\text{F}$ ).

Over a Proximitor Sensor and extension cable temperature range of  $-35\text{ }^{\circ}\text{C}$  to  $+65\text{ }^{\circ}\text{C}$  ( $-31\text{ }^{\circ}\text{F}$  to  $+149\text{ }^{\circ}\text{F}$ ) with the probe between  $0\text{ }^{\circ}\text{C}$  to  $+45\text{ }^{\circ}\text{C}$  ( $+32\text{ }^{\circ}\text{F}$  to  $+113\text{ }^{\circ}\text{F}$ ), the ISF remains within  $\pm 18\%$  of 7.87 V/mm (200 mV/mil) and the DSL remains within  $\pm 0.152\text{ mm}$  ( $\pm 6$  mils).

**Standard 9 metre system:**

Less than  $\pm 0.038\text{mm}$  ( $\pm 1.5$  mil) with components at  $0\text{ }^{\circ}\text{C}$  to  $+45\text{ }^{\circ}\text{C}$  ( $+32\text{ }^{\circ}\text{F}$  to  $+113\text{ }^{\circ}\text{F}$ ).

**Extended Temperature Range 5 and 9 metre systems:**

**Extended Temperature Range system performance over extended temperatures:**

Over a probe and extension cable temperature range of -35 °C to +260 °C (-31 °F to +500 °F) with the Proximitor Sensor between 0 °C to +45°C (+32 °F to +113 °F), the ISF remains within ±18% of 7.87 V/mm (200 mV/mil) and the DSL remains within ±0.152 mm (±6 mils).

**Frequency Response:**

0 to 10 kHz: +0, -3 dB, with up to 305 metres (1000 feet) of field wiring.

**Minimum Target Size:**

15.2 mm (0.6 in) diameter (flat target)

**Shaft Diameter**

**Minimum:**

50.8 mm (2 in)

**Recommended minimum:**

76.2 mm (3 in)

When gapped at the center of the linear range, the interaction between two separate transducer systems (cross-talk) will be less than 50 mV on shaft diameters of at least 50 mm (2 in) or greater. Care should be taken to maintain minimum separation of transducer tips, generally at least 40 mm (1.6 in) for axial position measurements or 38 mm (1.5 in) for radial vibration measurements to limit cross-talk to 50 mV or less. Radial vibration or position measurements on shaft diameters smaller than 76.2 mm (3 in) will generally result in a

change in scale factor. Consult Performance Specification 159484 for additional information.

<b>Effects of 60 Hz Magnetic Fields Up to 300 Gauss:</b>				
<b>Output voltage in mil pp/gauss:</b>				
<b>Gap</b>	<b>5 metre Proximitor Sensor</b>	<b>9 metre Proximitor Sensor</b>	<b>Probe</b>	<b>Ext. Cable</b>
10 mil	0.0119	0.0247	0.0004	0.0004
50 mil	0.0131	0.0323	0.0014	0.0014
90 mil	0.0133	0.0348	0.0045	0.0045

**Electrical Classification:**

Complies with the European CE mark.

**Hazardous Area Approvals**

**Note:** Multiple approvals for hazardous areas certified by Canadian Standards Association (CSA/NRTL/C) in North America and by Baseefa (2001) in Europe.

**North America:**

Ex ia IIC T4/T5; Class I Zone 0 or Class 1 Division 1; Groups A, B, C, and D, when installed with intrinsically safe zener barriers per drawing 141092 or when installed with galvanic isolators. Certificate number 1109248(LR 26744-222)

Ex nA IIC T4/T5 Class I Zone 2 or Class I, Division 2, Groups A, B, C, and D when installed without barriers per drawing 140979. T5 @ Ta = -35 °C to +85 °C. T4 @ Ta = -51 °C to +100 °C. Certificate number 1109248(LR 26744-222)

**Europe:**

 II 1 G EEx ia IIC T4/T5. EC certificate number BAS99ATEX1101, when installed per drawing 141092.

 II 3 G EEx nAII T4/T5. EC certificate number BAS99ATEX3100U, when installed per drawing 140979. T5 @ Ta = -35 °C to +85 °C. T4 @ Ta = -51 °C to +100 °C.

**IEC Ex**

3300 XL Proximitor Sensor, ia  
IECEX BAS04.0055X

Ex ia IIC T4 / T5 (-51°C ≤ Ta ≤ +100°C / -35°C ≤ Ta ≤ +85°C)

Terminal Block Connections

Ui = -28V      Ci = 0

li = 140mA      Li = 10µH

Pi = 0.84W

Coaxial Connection

Ui = -28V      Ci = 5.7nF

li = 140mA      Li = 0.85mH

Pi = 0.84W

Load Parameters

The capacitance and either the inductance or the inductance to resistance (L/R) ratio of the load connected to the probe coaxial terminal, must not exceed the following values:

The Proximitor must be installed so as to minimize the risk of impact or friction with other metallic surfaces.

*3300 XL  
Proximitor  
Sensor, nA*

IECEX BAS04.0057X

AEx nA II T4 / T5 (-51°C ≤ Ta ≤ +100°C / -35°C ≤ Ta ≤ +85°C)

The terminals must be provided with a level of protection of at least IP54.

Ui = -28V

*3300 XL 8mm  
Eddy Current  
Probe, ia*

IECEX BAS04.0056

AEx ia IIC Temperature Classification per the table below.

Temperature Classification	Ambient Temperature (Probe Only)
T1	-51°C to +232°C
T2	-51°C to +177°C
T3	-51°C to +120°C
T4	-51°C to +80°C
T5	-51°C to +40°C

Ui = -28V      Ci = 1.5nF

li = 140mA      Li = 200µH

Pi = 0.84W

**3300 XL 8mm Eddy Current Probe, nA**

IECEX BAS04.0058X

Ex nA II Temperature Classification per the table above.

Must be supplied from a voltage limited source.

EEx nA for Zone 2, Group IIC, EC certificate number BAS99ATEX3100U.

Group	Capacitance µF	Inductance mH	L/R Ratio µH/Ω
IIC	0.077	0.99	35
IIB	0.644	7.41	142
IIA	2.144	15.6	295

**Mechanical**

**Probe Tip**

**Material:**

Polyphenylene sulfide (PPS).

**Probe Case**

**Material:**

AISI 303 or 304 stainless steel (SST).

**Probe Cable**

**Specifications:**

*Standard cable:*

75 Ω triaxial, fluoroethylene propylene (FEP) insulated probe cable in the following total probe lengths: 0.5, 1, 1.5, 2, 5, or 9 metres.

*Extended  
Temperature  
Range cable:*

75 Ω triaxial, perfluoroalkoxy (PFA) insulated probe cable in the following total probe lengths: 0.5, 1, 1.5, 2, 5, or 9 metres.

**Extension Cable**

**Material:**

75 Ω triaxial, fluoroethylene propylene (FEP) insulated.

**Extended  
Temperature  
Range (ETR)  
Extension Cable  
Material:**

75 Ω triaxial, perfluoroalkoxy (PFA) insulated.

**Proximator  
Sensor Material:**

A308 aluminum

**System Length:**

5 or 9 metres including extension cable

**Standard Probe  
and Extension  
Cable Armor  
(optional):**

Flexible AISI 302 or 304 SST with FEP outer jacket.

**Extended  
Temperature  
Range Probe  
and Extension  
Cable Armor  
(optional):**

Flexible AISI 302 or 304 SST with PFA outer jacket.

**Tensile Strength  
(maximum  
rated):**

330 N (75 lbf) probe case to probe lead. 270 N (60 lbf) at probe lead to extension cable connectors.

**Connector  
material:**

Gold-plated brass or gold-plated beryllium copper.

Probe case torque:	Maximum Rated	Recommended
Standard forward-mounted probes	33.9 N•m (300 in•lbf)	11.2 N•m (100 in•lbf)
Standard forward-mount probes - first three threads	22.6 N•m (200 in•lbf)	7.5 N•m (66 in•lbf)
Reverse mount probes	22.6 N•m (200 in•lbf)	7.5 N•m (66 in•lbf)

**Connector-to-connector torque**

*Recommended torque:  
see table:*

Connector Type	Tightening Instructions
Two 3300 XL gold "click" type connectors	Finger tight
One non-XL stainless steel connector and one 3300 XL connector	Finger tight plus 1/8 turn using pliers

**Maximum  
torque:**

0.565 N•m (5 in•lbf)

**Minimum Bend  
Radius:**

25.4 mm (1.0 in)

**Total System  
Mass (typical):**

0.7 kg (1.5 lbf)

**Probe:**

323 g (11.38 oz)

**Extension Cable:**

34 g/m (0.4 oz/ft)

**Armored  
Extension cable:**

103 g/m (1.5 oz/ft)

Proximitior

Sensor:

246 g (8.7 oz)

---

## Environmental Limits

### Probe Temperature Range

#### Operating and Storage

##### Temperature:

*Standard probe:*

-51 °C to +177 °C (-60 °F to +351 °F)

*Extended Temperature Range probe:*

-51 °C to +177 °C (-60 °F to +351 °F) for the probe tip; -51 °C to +260 °C (-60 °F to +500 °F) for the probe cable and connector.

---

**Note:** Exposing the probe to temperatures below -34 °C (-30 °F) may cause premature failure of the pressure seal.

### Extension Cable Temperature Range

#### Operating and Storage Temperature:

*Standard cable:*

-51 °C to +177 °C (-60 °F to +351 °F)

*Extended Temperature Range cable:*

-51 °C to +260 °C (-60 °F to +500 °F)

**Proximitior  
Sensor  
Temperature  
Range**

#### Operating Temperature:

-51 °C to +100 °C (-60 °F to +212 °F)

## Storage

### Temperature:

-51 °C to +105 °C (-60 °F to +221 °F)

### Relative Humidity:

Less than a 3% change in Average Scale Factor (ASF) when tested in 93% humidity in accordance with IEC standard 68-2-3 for up to 56 days.

### Probe Pressure:

3300 XL 8 mm probes are designed to seal differential pressure between the probe tip and case. The probe sealing material consists of a Viton® O-ring. Probes are not pressure tested prior to shipment. Contact our custom design department if you require a test of the pressure seal for your application.

**Note:** It is the responsibility of the customer or user to ensure that all liquids and gases are contained and safely controlled should leakage occur from a proximity probe. In addition, solutions with high or low pH values may erode the tip assembly of the probe causing media leakage into surrounding areas. Bently Nevada, LLC will not be held responsible for any damages resulting from leaking 3300 XL 8 mm proximity probes. In addition, 3300 XL 8 mm proximity probes will not be replaced under the service plan due to probe leakage.

### Patents:

5,016,343;  
5,126,664;  
5,351,388, and  
5,685,884.

Components or procedures described in these patents apply to this product.

---

## Ordering Information

### 3300 XL 8 mm Proximity Probes:

330101 3300 XL 8 mm Probe, 3/8-24 UNF thread, without armor<sup>3</sup>

330102 3300 XL 8 mm Probe, 3/8-24 UNF thread, with armor<sup>3</sup>

### Part Number-AXX-BXX-CXX-DXX-EXX

**A:** Unthreaded Length Option

---

Specifications and Ordering Information  
Part Number 141194-01  
Rev. H (08/07)

---

**Note:** Unthreaded length must be at least 0.8 inches less than the case length.

---

Order in increments of 0.1 in  
**Length configurations:**  
**Maximum unthreaded length:** 8.8 in  
**Minimum unthreaded length:** 0.0 in  
**Example:** 0 4 = 0.4 in

**B:** Overall Case Length Option

Order in increments of 0.1 in  
**Threaded length configurations:**  
**Maximum case length:** 9.6 in  
**Minimum case length:** 0.8 in  
**Example:** 2 4 = 2.4 in

**C:** Total Length Option

**05** 0.5 metre (1.6 feet)  
**10** 1.0 metre (3.3 feet)  
**15** 1.5 metre (4.9 feet)  
**20** 2.0 metres (6.6 feet)  
**50** 5.0 metres (16.4 feet)<sup>1</sup>  
**90** 9.0 metres (29.5 feet)

**D:** Connector and Cable-Type Option

**01** Miniature coaxial ClickLoc connector with connector protector, standard cable  
**02** Miniature coaxial ClickLoc connector, standard cable  
**11** Miniature coaxial ClickLoc connector with connector protector, FluidLoc cable  
**12** Miniature coaxial ClickLoc™ connector, FluidLoc cable

**E:** Agency Approval Option

**00** Not required  
**05** Multiple Approvals

---

**3300 XL 8 mm Proximity Probes, Metric:**

**330103** 3300 XL 8 mm Probe, M10 x 1 thread, without armor<sup>3</sup>

**330104** 3300 XL 8 mm Probe, M10 x 1 thread, with armor<sup>3</sup>

**Part Number-AXX-BXX-CXX-DXX-EXX**

**A:** Unthreaded Length Option

---

**Note:** Unthreaded length must be at least 20 mm less than the case length.

---

Order in increments of 10 mm.  
**Length configuration:**  
**Maximum unthreaded length:** 230 mm  
**Minimum unthreaded length:** 0 mm  
**Example:** 0 6 = 60 mm

**B:** Overall Case Length Option

Order in increments of 10 mm.

**Metric thread configurations:**

**Maximum length:** 250 mm

**Minimum length:** 20 mm

**Example:** 0 6 = 60 mm

**C:** Total Length Option

**05** 0.5 metre (1.6 feet)  
**10** 1.0 metre (3.3 feet)  
**15** 1.5 metres (4.9 feet)  
**20** 2.0 metres (6.6 feet)  
**50** 5.0 metres (16.4 feet)<sup>1</sup>  
**90** 9.0 metres (29.5 feet)

**D:** Connector and Cable-Type Option

**01** Miniature coaxial ClickLoc connector with connector protector, standard cable  
**02** Miniature coaxial ClickLoc connector, standard cable  
**11** Miniature coaxial ClickLoc connector with connector protector, FluidLoc cable  
**12** Miniature coaxial ClickLoc™ connector, FluidLoc cable

**E:** Agency Approval Option

**00** Not required  
**05** Multiple Approvals

---

**3300 XL 8 mm Reverse Mount Probes**

**330105-02-12-CXX-DXX-EXX, 3/8-24 UNF threads<sup>3</sup>**

**330106-05-30-CXX-DXX-EXX, M10 x 1 threads<sup>3</sup>**

**Option Descriptions**

**C:** Total Length Option

**05** 0.5 metre (1.6 feet)  
**10** 1.0 metre (3.3 feet)  
**15** 1.5 metre (4.9 feet)  
**20** 2.0 metres (6.6 feet)  
**50** 5.0 metres (16.4 feet)<sup>1</sup>  
**90** 9.0 metres (29.5 feet)

**D:** Connector Option

**02** Miniature ClickLoc coaxial connector  
**12** Miniature ClickLoc coaxial connector, FluidLoc cable


---

**Note:** The FluidLoc cable options -10 and -12 are not necessary on the vast majority of 330105 and 330106 installations due to the presence of the probe sleeve. Consider carefully the application before ordering the FluidLoc cable options

---

**E:** Agency Approval Option

**00** Not required  
**05** Multiple Approvals

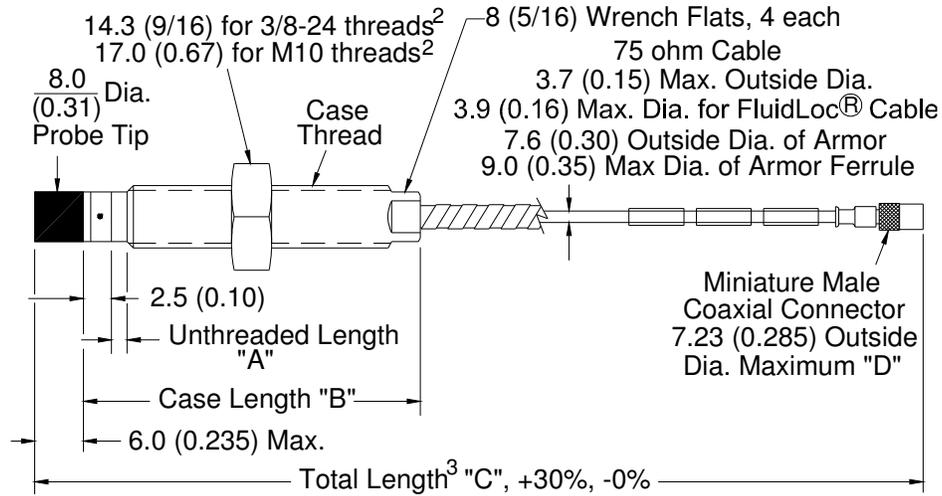


**Figure 14 3300 XL 8 mm Proximity probes, Standard Mount**

330101 and 330191, 3/8-24 UNF-2A, without armor <sup>7</sup>

330102 and 330192, 3/8-24 UNF-2A, with armor <sup>6</sup>

330103 and 330193, M10X1 thread, without armor <sup>7</sup>

330104 and 330194, M10X1 thread, with armor <sup>6</sup>

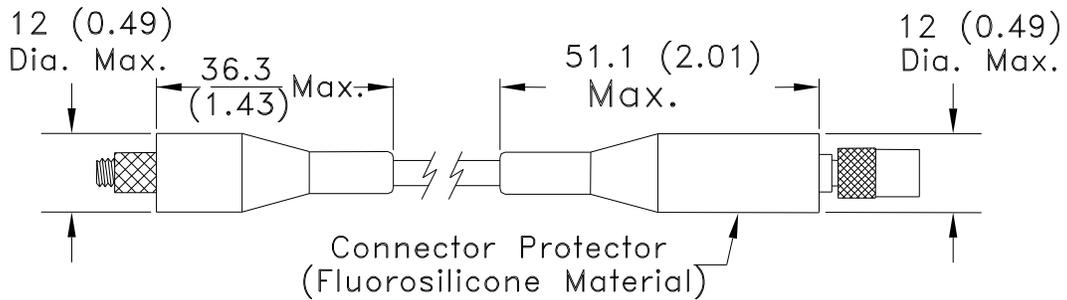

**Figure 15 Installed Connector Protectors**