


Eddy Current Signal Converter

Sensor Signal Converter designed for critical turbo machinery applications such as steam, gas and hydro turbines, compressors, pumps and fans to measure radial and axial shaft displacement, position, eccentricity and speed/key.

Dynamic Performance	
Frequency Range (-3 dB)	0 to 20000 Hz
Rise Time	<15 μ s
NOTE: Designed for PR6422, PR6423, PR6424, PR6425, PR6426, PR 6453 For extended range use: CON021/91x-xxx PR6425 always requires extended range converter	
Environmental	
Operating Temperature Range	-30 to 100°C (-22 to 212°F)
Shock and Vibration	5g @ 60 Hz @ 25°C (77°F)
Protection Class	IP20
Power & Electrical	
Supply Voltage Range	-23V to -32V (Output Range -4V to -20V)
	-21V to -32V (Output Range -2V to -18V)
Physical	
Housing Material	LMgSi 0.5 F22
Weight	~ 120 grams (4.24 oz)
Mounting	4 Screws M5x20 (Included in Delivery)
Connections:	Transducer Self-Locking Lemo-Plug
	Supply/Output Screw Terminal Type (max.1.5mm ² , wire)

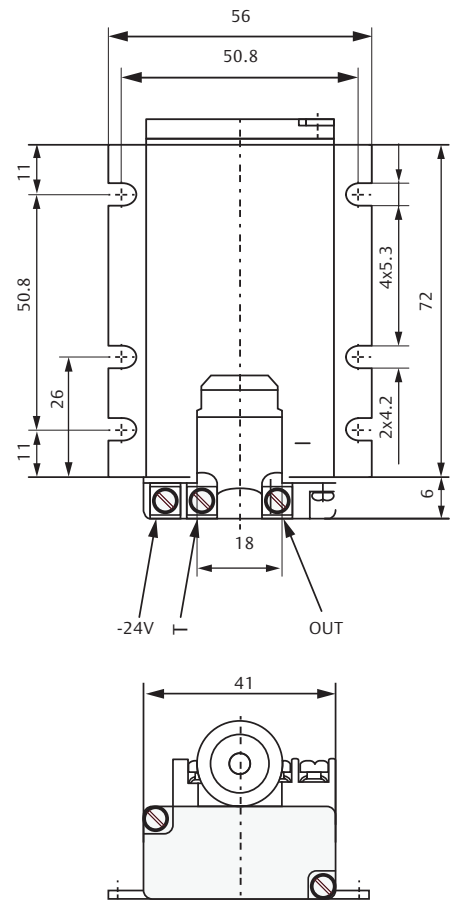

Compliance and Certifications	
CE	2014/30/EU 2014/34/EU 2011/65/EU EN61326-1 DIN EN 50581
ATEX	EN 60079-0:2009 EN 60079-11:2012
IEC-Ex	IEC 60079-0:2007-10; Edition 5 IEC 60079-11:2011; Edition: 6.0 IEC 60079-26:2006; Edition: 2
CSA	CAN/CSA-C22.2 NO. 0-M91 CAN/CSA-C22.2 NO. 157-92 CAN/CSA-C22.2 NO. 213-M1987 CAN/CSA-E60079-15-02 (R2006) CAN/CSA-C22.2 NO. 25-1966 CAN/CSA-C22.2 NO. 61010-1-04 ANSI/UL Standard 913-2004 ANSI/UL Standard 1604-1995 UL 60079-15 2002 UL 61010-1

Hazardous Area Approvals

Intrinsic Safety (iA)	
ATEX	II 2 G Ex ia IIC T4 Gb, -20°C ≤ Ta ≤ 80°C (Use with current limiting, e.g.: safety barrier)
IEC-Ex	Ex ia IIC T4 Gb, -20°C ≤ Ta ≤ 80°C (Use with current limiting, e.g.: safety barrier)
CSA	Class I Division 1, Groups A, B, C, D, T4 T4: -25°C ≤ Ta ≤ 80°C (Use with current limiting, e.g.: safety barrier)
Non-sparking (nA)	
CSA	Class I Division 2, Groups A, B, C, D Ex nA II T3..T4 AEx nA II T3..T4 T4: -25°C ≤ Ta ≤ 80°C