● Digital I/O Modules (CENTUM-ST Compatible)

The Digital I/O Modules (CENTUM-ST Compatible) receive contact or voltage status signals from the field, and/or output status signals to the field via transistor contacts.


Item	Specifications		
Model	**ADV859**	**ADV159**	**ADV559**
Number of I/O channels	16-channel input, 16-channel output	32-channel input	32-channel output
Signal isolation	Isolated channels	Isolated channels	Isolated channels
Input signal	Contact input: OFF signal 100 kΩ or more ON signal 200 Ω or less Minimum current value when contact is short-circuited: 1.25 mA Voltage input: OFF signal 4.5 to 25 V DC ON signal ±1 V DC, 200 Ω or less		—
Input contact rating	5 V DC, 20 mA or more		—
Pushbutton input function	Not supported	Supported	—
Input response time	8 ms (for status input)	8 ms (for status input)	—
Minimum ON detection time	—	20 ms (for pushbutton input)	—
Maximum ON/OFF cycle	—	25 Hz (for pushbutton input)	—
Output signal	Transistor contact	—	Transistor contact
Output contact rating	Inductive load, resistive load: 30 V DC, 100 mA (*1)	—	Inductive load, resistive load: 30 V DC, 100 mA (*1)
Output response time	16 ms or less	—	16 ms or less
Pulse width	8 ms to 7200 s	—	8 ms to 7200 s
Pulse width resolution	8 ms, add max. 1ms for ON/OFF delay time	—	8 ms, add max. 1ms for ON/OFF delay time
Maximum current consumption	450 mA (5 V DC)	330 mA (5 V DC)	570 mA (5 V DC)
Weight	Approx. 0.30 kg	Approx. 0.40 kg	Approx. 0.30 kg
External connection	Dedicated cable (KS2)	Dedicated cable (KS2)	Dedicated cable (KS2)
Compatible card	ST2 compatible	ST3 compatible	ST4 compatible


*1: Connect a spark killer diode when driving DC relay.

Item	Specifications		
Model	**ADV869**	**ADV169**	**ADV569**
Number of I/O channels	32-channel input, 32-channel output	64-channel input	64-channel output
Signal isolation	Common every 16-channel	Common every 16-channel	Common every 16-channel
Input signal	Contact input: OFF signal 100 kΩ or more ON signal 200 Ω or less Minimum current value when contact is short-circuited: 1.25 mA Voltage input: OFF signal 4.5 to 25 V DC ON signal ±1 V DC, 200 Ω or less		—
Input contact rating	5 V DC, 20 mA or more		—
Pushbutton input function	Not supported	Not supported	—
Input response time	8 ms (for status input)	8 ms (for status input)	—
Output signal	Transistor contact	—	Transistor contact
Output contact rating	Inductive load, resistive load: 30 V DC, 100 mA (*1)	—	Inductive load, resistive load: 30 V DC, 100 mA (*1)
Output response time	16 ms or less	—	16 ms or less
Pulse width	8 ms to 7200 s	—	8 ms to 7200 s
Pulse width resolution	8 ms, add max. 1 ms for ON/OFF delay time	—	8 ms, add max. 1 ms for ON/OFF delay time
Maximum current consumption	800 mA (5 V DC)	800 mA (5 V DC)	800 mA (5 V DC)
Weight	Approx. 0.30 kg	Approx. 0.30 kg	Approx. 0.30 kg
External connection	Dedicated cable (KS9)	Dedicated cable (KS9)	Dedicated cable (KS9)
Compatible card	ST5 compatible	ST6 compatible	ST7 compatible

*1: Connect a spark killer diode when driving DC relay.

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

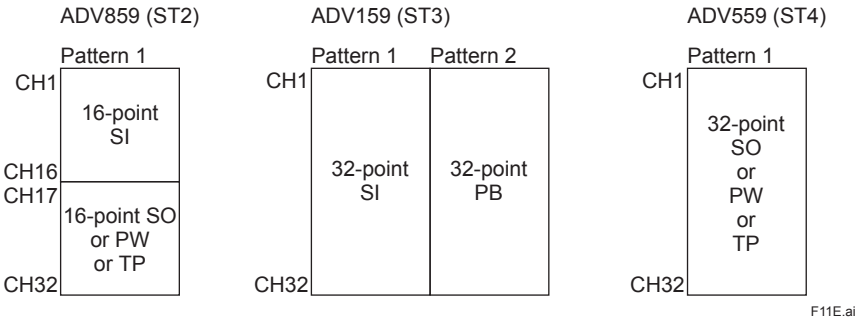

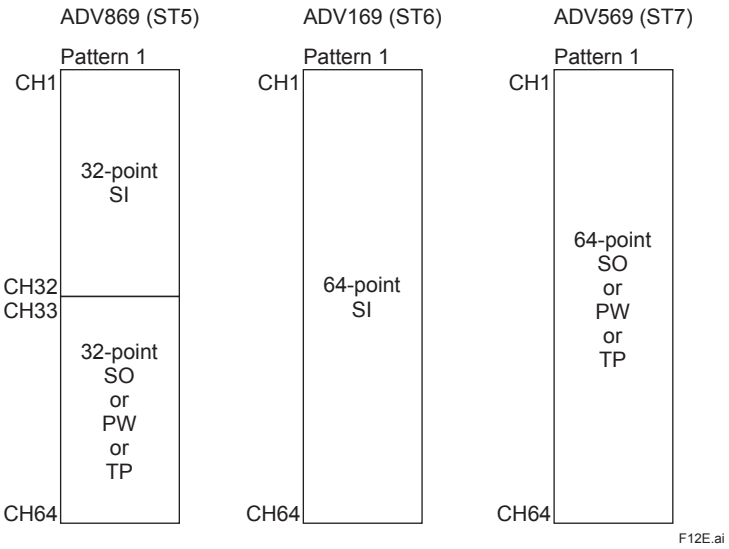

For PW (pulse width output), use two contiguous terminal numbers; the first of these must be odd-numbered. If both PW and TP (time-proportioning ON/OFF output) are used together, successive pairs of terminals must be either PW or TP terminals, as shown in the example below.

Example:

Terminals 1 and 2	PW (one PW output, two contiguous terminal nos.)
Terminals 3 and 4	TP (two outputs, two contiguous terminal nos.)
Terminals 5 and 6	TP (two outputs, two contiguous terminal nos.)
⋮	⋮
Terminals 15 and 16	PW (one PW output, two contiguous terminal nos.)

For PW output, use two contiguous terminal numbers; the first of these must be odd-numbered. Also if SO and TP terminals are used together with PW, individual terminals that are not PW can be either SO or TP terminals.

Example:

Terminals 1 and 2	PW (one PW output, two contiguous terminal nos.)
Terminal 3	TP or SO
Terminal 4	TP or SO
⋮	⋮
Terminal 16	TP or SO

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

Digital I/O Module

		Description
Model	ADV859	Digital I/O Module for Compatible ST2 (16-channel input/16-channel output, Isolated channels)
Suffix Codes	-P	With pulse width function/time-proportional output function
	0	Always 0
	0	Basic type
	1	With ISA Standard G3 option

		Description
Model	ADV159	Digital Input Module for Compatible ST3 (32-channel, Isolated channels)
Suffix Codes	-P	With pushbutton input
	0	Always 0
	0	Basic type
	1	With ISA Standard G3 option

		Description
Model	ADV559	Digital Output Module for Compatible ST4 (32-channel output, Isolated channels)
Suffix Codes	-P	With pulse width function/time-proportional output function
	0	Always 0
	0	Basic type
	1	With ISA Standard G3 option

		Description
Model	ADV869	Digital I/O Module for Compatible ST5 (32-channel input/32-channel output, Isolated, Common Minus Side Every 16-channel)
Suffix Codes	-P	With pulse width function/time-proportional output function
	0	Always 0
	0	Basic type
	1	With ISA Standard G3 option

		Description
Model	ADV169	Digital Input Module for Compatible ST6 (64-channel, Isolated, Common Minus Side Every 16-channel)
Suffix Codes	-P	Standard type
	0	Always 0
	0	Basic type
	1	With ISA Standard G3 option

		Description
Model	ADV569	Digital Output Module for Compatible ST7 (64-channel output, Isolated, Common Minus Side Every 16-channel)
Suffix Codes	-P	With pulse width function/time-proportional output function
	0	Always 0
	0	Basic type
	1	With ISA Standard G3 option

■ APPLICABLE STANDARDS

Refer to the GS “Integrated Production Control System CENTUM VP System Overview” (GS 33J01A10-01EN).

■ ORDERING INFORMATION

Specify the model and suffix codes.
For selecting the right products for explosion protection, please refer to TI 33Q01J30-01E without fail.

■ TRADEMARK

- CENTUM is a registered trademark of Yokogawa Electric Corporation.
- Other company and product names appearing in this document are trademarks or registered trademarks of their respective holders.

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation
Subject to change without notice.