


Honeywell ACX633 51196655-100

ACX633 51196655-100 Product Information Manual

TDC 3000 dual-node power supply

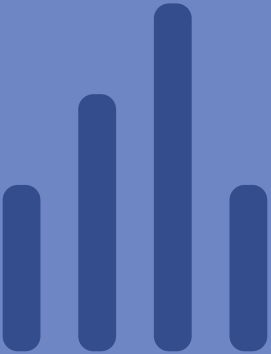

DOCUMENT SCOPE

Independent Apter Power manual limited to verified identity evidence and any directly relevant Honeywell sources listed in this document. No product photograph is included.

Product / lookup identity	Honeywell ACX633 51196655-100
Reference number	51196655-100
Document basis	Published Honeywell product records, PDFs, and manuals listed on page 3



Product page

<https://www.apterpower.com/Honeywell/acx633-51196655-100>
Apter Power contact

sales13@apterpower.com | +86 180 3023 5313

Workflow and system context

Honeywell ACX633 51196655-100 is a 165 W dual-node power supply for documented TDC 3000 Dual Node Card File assemblies. Use ACX633 51196655-100 only with the exact host, rack or chassis, terminal hardware, cable and project configuration specified for the installed system.

- | | |
|----|---|
| 01 | System Inputs: TDC 3000 dual-node power supply |
| 02 | Processing: Use ACX633 51196655-100 only with the exact host, rack or chassis, terminal hardware, cable and project configuration specified for the installed system. |

Published context and boundaries

- | | |
|----|---|
| 01 | Use ACX633 51196655-100 only with the exact host, rack or chassis, terminal hardware, cable and project configuration specified for the installed system. |
| 02 | Lifecycle evidence boundary: Use the cited model-level lifecycle statement where supplied. |
| 03 | Verify the complete Honeywell ACX633 51196655-100 physical label before use. |

Verification and release checks

01	Verify the complete Honeywell ACX633 51196655-100 physical label before use.
02	Use ACX633 51196655-100 only with the exact host, rack or chassis, terminal hardware, cable and project configuration specified for the installed system.
03	Confirm the exact rack or chassis position, terminal assembly, cable, connector, power and project revision.
04	De-energize the equipment unless the exact hardware manual and site procedure explicitly permit energized service.
05	Back up controller, communication and I/O configuration before replacement or migration work.
06	Do not transfer electrical, communication or mechanical values from a related model or different suffix.

Identity and release controls

Verification Status	Verified Product Reference
---------------------	----------------------------