LTC Batteries

SL-760 Size: AA

› iXtra – long term high performance


Performance Data

(Typical values for batteries stored at +25 °C for one year)


System	Lithium Thionyl Chloride
Nominal voltage	3.6 V
Nominal capacity	2.2 Ah
Nominal current	2 mA
Max. continuous discharge current	100 mA
Pulse current capability	200 mA
Anode surface area	14 cm^2
Lithium content	0.65 g
Weight	18 g
Volume	8 cm^3
Temperature range	–55 °C ... +85 °C




Typical Discharge Curves at +25 °C

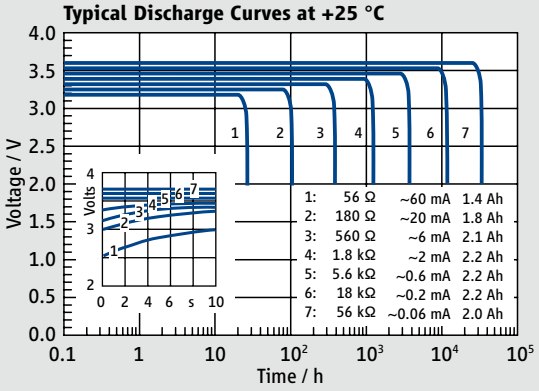


Available Capacity

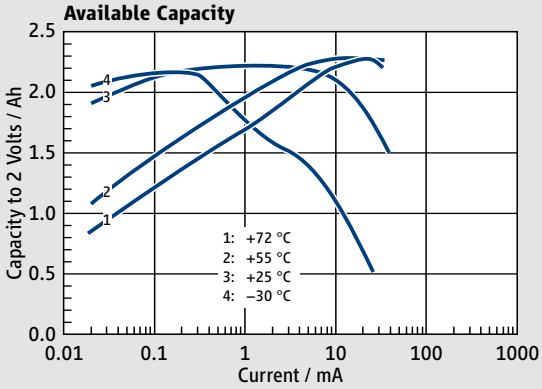


SL-760/S

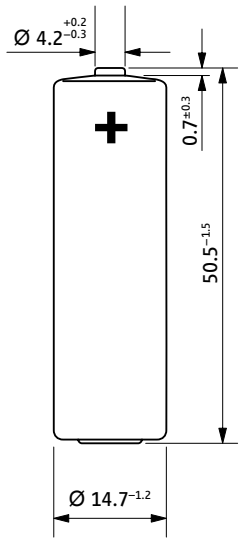


SL-760/T




SL-760/P

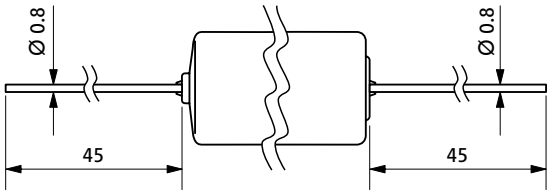


Operating Voltage

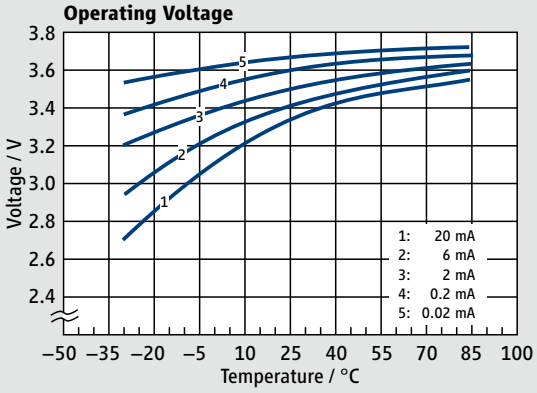


SL-760/PR



SL-760/PT



Voltage Response at +25 °C, Pulse: 20 mA

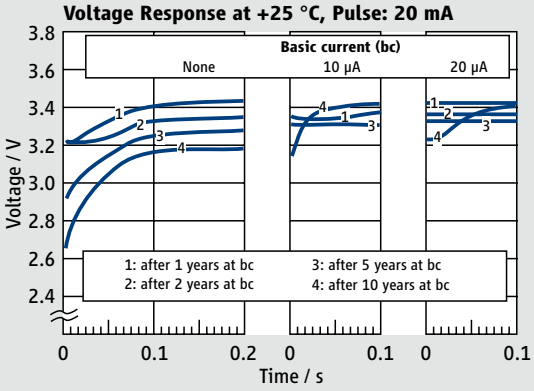

Available Terminations		Catalogue No.
SL-760/S	Standard	11 1 07601 00
SL-760/T	Tags	11 1 07602 00
SL-760/P	Pins	11 1 07603 00
SL-760/PR	Pins radial	11 1 07606 00
SL-760/PT	Polarized tags	11 1 07608 00

WARNING: Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.

Any values given here are for informational purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.

Tadiran Batteries GmbH • Industriestr. 22 • 63654 BÜDINGEN
GERMANY • Tel.: +49 (0)6042 954-0 • www.tadiranbatteries.de

PDC24Eng