Linear Range	2 mm (80 mils). Linear range begins at approximately 0.25 mm (10 mils) from target and is from 0.25 to 2.3 mm (10 to 90 mils).
Recommended Gap Setting	1.27 mm (50 mils).
Incremental Scale Factor	7.87 V/mm (200 mV/mil) ±6.5% typical, including interchangeability error when measured in increments of 0.25mm (10 mils) over the linear range.
Deviation from Best Fit Straight Line (DSL)	Less than ±0.038 mm (±1.5 mil) typical deviation from best fit straight line.
Probe Temperature Stability (typical)	Over probe temperature range of -35°C to +177°C (-31°F to +350°F), the incremental scale factor remains within ±10% of 7.87 V/mm (200 mV/mil) and the deviation from the best fit straight line remains within ±0.076 mm (±3 mils).
Frequency Response	0 to 10 kHz: +0, -3 dB, with up to 305 meters (1000 feet) of field wiring.
Minimum Target Size	15.2 mm (0.6 in) diameter (flat target)
Shaft Diameter	
Minimum	50.8 mm (2 in)
Recommended minimum	76.2 mm (3 in)

When gapped at the center of the linear range, the interaction between 2 separate transducer systems (cross-talk) will be less than 50 mV on shaft diameters of at least 50 mm (2 in) or greater. Care should be taken to maintain minimum separation of transducer tips, generally at least 40 mm (1.6 in) for axial position measurements or 38 mm (1.5 in) for radial vibration measurements to limit cross-talk to 50 mV or less. Radial vibration or position measurements on shaft diameters smaller than 76.2 mm (3 in) will generally result in a change in scale factor. Consult Performance Specification 155687 for additional information.

Effects of 60 Hz Magnetic Fields Up to 300 Gauss

Output Voltage in Mil (pk-pk)/Gauss (5-Meter System)			
Gap	**XL Proximitor Sensor**	**Probe**	**XL Ext. Cable**
10 mil	0.0119	0.0004	0.0004
50 mil	0.0131	0.0014	0.0014
90 mil	0.0133	0.0045	0.0045

Electrical Certification

Complies with the European CE mark.

Mechanical

Probe Tip Material	Polyphenylene sulfide (PPS)
Probe Case Material	AISI 303 or 304 stainless steel (SST)
Probe Cable	75 Ω triaxial, fluoroethylene propylene (FEP) insulated probe cable in the following lengths: 0.5, 1, 2, 5, or 9 meters (1.6, 3.3, 16.4, or 29.5 feet)
System Length	5 or 9 meters (16.4 or 29.5 feet) including extension cable
Extension Cable Material	75 W triaxial, fluoroethylene propylene (FEP) insulated
Probe and Extension Cable Armor	Flexible AISI 302 or 304 SST with FEP outer jacket

5mm Probe Tensile Strength	222 N (50 lbf) probe case to probe lead. 222 N (50 lbf) probe lead to extension cable connectors
Connector material	Gold-plated brass or gold-plated beryllium copper
Probe case torque	5.1 N·m (45in·lb) recommended 7.3 N·m (65 in·lb) maximum
Connector-to-connector torque	Refer to the table below: Recommended Torque
Maximum torque	0.565 N·m (0.42 ft•lbf)
Minimum Cable Bend Radius	25.4 mm (1.0in)
Weight	
Total System	0.71 kg (1.6 lb), typical
3300 5mm Probe	323 g (11.39 oz).
XL Extension Cable	34 g/m (0.4 oz/ft) 103 g/m (1.5 oz/ft) (armored)
XL Proximitor Sensor	246 g (8.7 oz)

Recommended Torque	
Connector Type	**Tightening Instructions**
2 3300 XL gold "click" type connectors	Finger tight
1 non-XL stainless steel connector and 1 3300 XL connector	Finger tight plus 1/8 turn using pliers

Thread Engagement Limits

Probe Case Thread	Maximum Length of Thread Engagement
1/4-28	0.375 in
M8x1	12 mm

Maximum thread engagement lengths are per the industry standard of 1.5 times the nominal thread diameter. A fit class matching that of the external probe thread is assumed for all internal threads. Applications with thread engagement lengths exceeding the values in the table above may exhibit binding during installation. Contact your Bently Nevada representative if you require probe thread engagement lengths exceeding the values above. Bently Nevada does not replace proximity probes under warranty due to excessive thread engagement lengths.

When drilling and tapping a mounting hole **for a 1/4-28 probe**, a **#3 or larger tap drill** is recommended.

Environmental Limits

Probe Temperature Range	-35°C to +177°C (-31°F to +351°F)

Exposing the probe to temperatures below –34°C (-30°F) may cause premature failure of the pressure seal.

Extension Cable Temperature Range	-51°C to +177°C (-60°F to +351°F) for standard extension cable. ref 141194-01

Probe Pressure

3300 5mm probes are designed to seal differential pressure between the probe tip and case. The probe sealing material consists of a fluorocarbon O-ring. We do not pressure test probes prior to shipment. Contact our custom design department if a test of the pressure seal for your application is required.



It is the responsibility of the customer or user to ensure that all liquids and gases are contained and safely controlled should a proximity probe leak. In addition, solutions with high or low pH values may erode the tip assembly of the probe causing media to leak into surrounding areas. Bently Nevada does not be held responsible for any damages resulting from leaking 3300 5 mm proximity probes. In addition, Bently Nevada does not replace 3300 5 mm proximity probes under the service plan due to probe leakage.

Temperature Schedule	
Temperature Classification	**Ambient Temperature (Probe Only)**
For EPL Ga and Gc	
T1	-55°C to +232°C
T2	-55°C to +177°C
T3	-55°C to +120°C
T4	-55°C to +80°C
T5	-55°C to +40°C
For EPL Dc	
T280C @ Ta	-55°C to +232°C
T225C @ Ta	-55°C to +177°C
T170C @ Ta	-55°C to +120°C
T130C @ Ta	-55°C to +80°C
T90C @ Ta	-55°C to +40°C

Hazardous Area Conditions of Safe Use

Zone 0/1:

1. The exposed plastic surface of the Probes with 50 mm diameter, under certain extreme circumstances, may generate an ignition-capable level of electrostatic charge. Therefore, this version of the equipment shall not be installed in a location where the external conditions are conducive to the build-up of electrostatic charge on the plastic surface. In addition, the equipment shall only be cleaned with a damp cloth. This is particularly important if the equipment is installed in a Zone 0 location.
2. The end user is to ensure appropriate earthing upon installation.

Zone 2:

1. This product is not resistant to light as required by the relevant clause of EN 60079-0, therefore, it shall only be installed in a location where it is not exposed to direct sunlight or any other source of ultra-violet (UV) light.
2. The connector shall not be disconnected while the circuit is live unless the area is known to be non-hazardous.
3. The end user is to ensure appropriate earthing upon installation.

Ordering Information

For the detailed listing of country and product-specific approvals, refer to the *Approvals Quick Reference Guide (108M1756)*.

For additional technical documentation, please log in to bntechsupport.com and access the Bently Nevada Media Library.

3300 5mm Proximity Probes

330171 3300 5mm Probe, 1/4-28 UNF thread, without armor

330172 3300 5mm Probe, 1/4-28 UNF thread, with armor

Part Number-AA-BB-CC-DD-EE	
A: Unthreaded Length Option	

Unthreaded length must be at least 0.8 in. less than the case length. Order in increments of 0.1 in.

Length configurations: Maximum unthreaded length:
8 8 = 8.8 in. Minimum unthreaded length:
0 0 = 0.0 in.
Example: 0 4 = 0.4 in.

B: Overall Case Length Option	
Order in increments of 0.1 in. **Threaded Length configurations:** Maximum unthreaded length: **9 6** = 9.6 in. Minimum unthreaded length: **0 8** = 0.8 in. **Example:2 4** = 2.4 in.	
C: Total Length Option	
0 5	0.5 meter (1.6 feet)
1 0	1.0 metre (3.3 feet)
2 0	2.0 metres (6.6 feet)
5 0	5.0 metres (16.4 feet)[1]
9 0	9.0 metres (29.5 feet)
D: Connector Option	
0 1	Miniature coaxial ClickLoc connector with connector protector, standard cable
0 2	Miniature coaxial ClickLoc connector, standard cable
1 1	Miniature coaxial ClickLoc connector with connector protector, FluidLoc cable
1 2	Miniature coaxial ClickLoc connector, FluidLoc cable
E: Agency Approval Option	
0 0	Agency Approval Option
0 5	Multiple Approvals

3300 5mm Proximity Probes, Metric


330173 3300 5mm Probe, M8 x 1 thread, without armor

330174 3300 5mm Probe, M8 x 1 thread, with armor

Part Number-AA-BB-CC-DD-EE
A: Unthreaded Length Option

Unthreaded length must be at least 20mm less than the case length. Order in increments of 10mm.

Length configurations: |
Maximum unthreaded length: **2 3** = 230mm
Minimum unthreaded length: **0 0** = 0.0mm
Example: 0 6 = 60mm

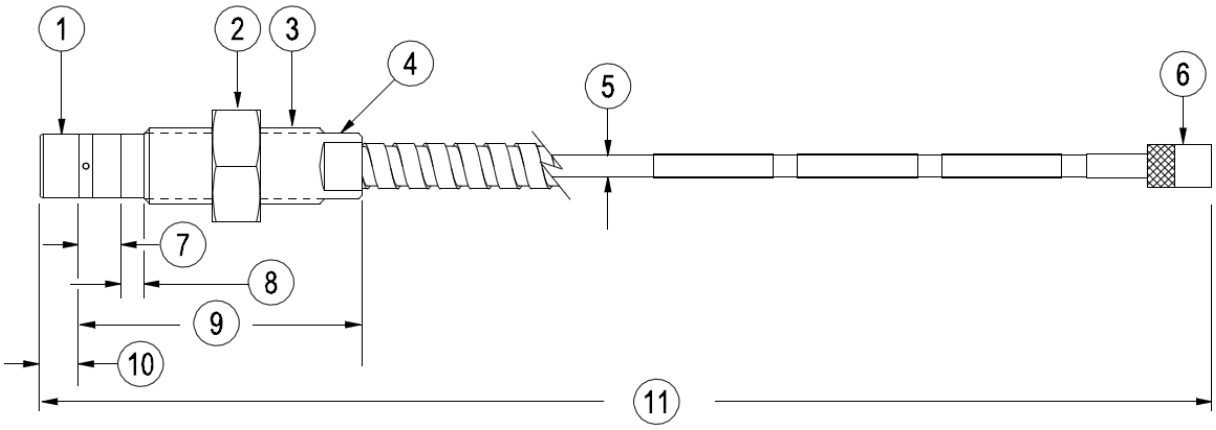

1. Probe tip, 5.2mm [0,21 in] diameter
2. 11.1 mm [7/16in] for 1/4-28 threads, 13.0mm [0.51in] for M8 thread. See Note 3.
3. Case thread
4. 5.6 [7/32] wrench flats for 1/4-28 threads, 7.0 [0.28] for M8 threads
5. 75Ω cable, 2.8mm [0.11 in] maximum outside diameter, 7.6mm [0.3 in] outside diameter of armor, 9.0mm [0.35in] maximum diameter of armor ferrule.
6. Miniature male coaxial connector, 7.23mm [0.285 in] maximum outside diameter “D”
7. 3.2 [0.13in]
8. Unthreaded length “A”
9. Case length “B”
10. 6.0mm [0.235in] maximum
11. Total length “C”, =30%, -0%. See Note.


Figure 3: 3300 5mm Proximity Probes, Standard Mount3

330171, 1/4-28 UNF-2A, without armor[7]

330172, 1/4-28 UNF-2A, with armor[6]


330173, M8X1 thread, without armor[7]

330174, M8X1 thread, with armor[6]

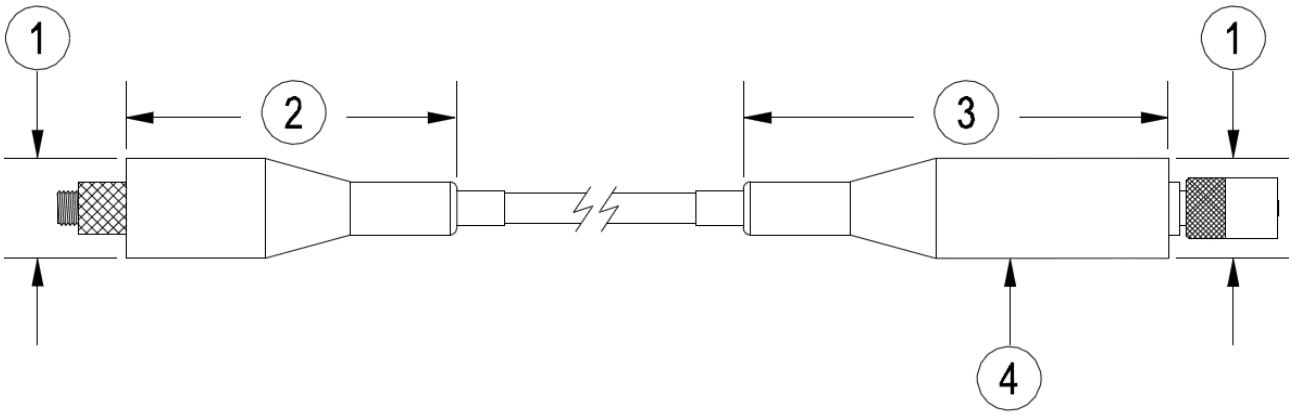

1. 12mm [0.40in] maximumd diameter
2. 36.3mm [1.43in] maximum
3. 51.1mm [2.01in] maximum
4. Connector protector (fluorosilicone material)

Figure 4: Installed Connector Protectors

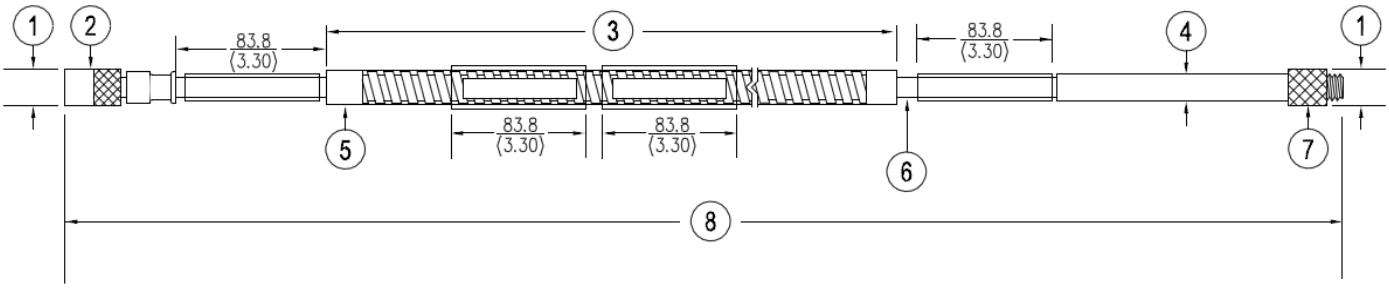

1. 7.2mm [0.25 in] maximum diameter
2. Miniature male coaxial connector
3. FEP or PFA coated armor. Armor length is 300mm [11.8in] less than cable length. See Note 5.
4. 75Ω cable, 3.7mm [0.15 in] maximum outside diameter, 3.9mm [0.16in] maximum diameter for FluidLoc cable, 7.6mm [0.30in] maximum outside diameter or armor, 9.0mm [0.35in] maximum diameter of armor ferrule.
5. Stainless steel ferrules, 8.4mm [0.33in] diameter
6. Miniature female coaxial connector
7. Cable length, +20%, -0%

Figure 5: 3300 XL Extension Cable