


MANUFACTURER-SOURCE TECHNICAL REFERENCE

Honeywell FC-TPSU-2430

FC-TPSU-2430 Product Information Manual

conformal-coated 24-to-30 VDC converter

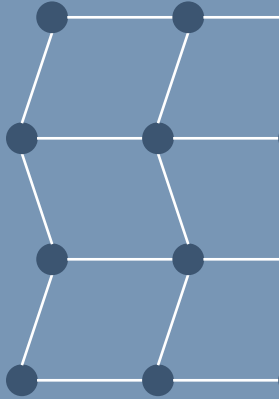

DOCUMENT SCOPE

Independent Apter Power manual limited to verified identity evidence and any directly relevant Honeywell sources listed in this document. No product photograph is included.

Product / lookup identity	Honeywell FC-TPSU-2430
Reference number	FC-TPSU-2430
Document basis	Published Honeywell product records, PDFs, and manuals listed on page 3



Product page

<https://www.apterpower.com/Honeywell/fc-tpsu-2430-v1-1>

Apter Power contact

sales13@apterpower.com | +86 180 3023 5313

Workflow and system context

Honeywell FC-TPSU-2430 is a conformal-coated Safety Manager converter that accepts 18-36 VDC and supplies regulated 30 VDC at 1 A. Use FC-TPSU-2430 only with the exact host, rack or chassis, terminal hardware, cable and project configuration specified for the installed system.

- | | |
|----|--|
| 01 | System Inputs: conformal-coated 24-to-30 VDC converter |
| 02 | Processing: Use FC-TPSU-2430 only with the exact host, rack or chassis, terminal hardware, cable and project configuration specified for the installed system. |

Published context and boundaries

- | | |
|----|--|
| 01 | Use FC-TPSU-2430 only with the exact host, rack or chassis, terminal hardware, cable and project configuration specified for the installed system. |
| 02 | Lifecycle evidence boundary: Use the cited model-level lifecycle statement where supplied. |
| 03 | Verify the complete Honeywell FC-TPSU-2430 physical label before use. |

Verification and release checks

01	Verify the complete Honeywell FC-TPSU-2430 physical label before use.
02	Use FC-TPSU-2430 only with the exact host, rack or chassis, terminal hardware, cable and project configuration specified for the installed system.
03	Confirm the exact rack or chassis position, terminal assembly, cable, connector, power and project revision.
04	De-energize the equipment unless the exact hardware manual and site procedure explicitly permit energized service.
05	Back up controller, communication and I/O configuration before replacement or migration work.
06	Do not transfer electrical, communication or mechanical values from a related model or different suffix.

Identity and release controls

Verification Status	Verified Product Reference
---------------------	----------------------------

Official Honeywell sources

Honeywell Safety Manager Hardware Reference	https://prod-edam.honeywell.com/content/dam/honeywell-edam/pmt/hps/products/pas/safety-systems/safety-manager/pmt-hps-safety-manager-hardware-reference-ep-sm-man-6284-r162.pdf
---	---